




## Dinmount Copper Patch Panel

The JCS DIN-Rail Mount Copper Patch Panel supports 12 keystone jacks.

Large top and bottom openings accommodate multiple field Ethernet cables. Dinmount on side or rear as required.

*CAT6 or CAT6A shielded or unshielded jacks can be preloaded.*

- DIN-Rail mount
- Top and bottom cable entry to suit installation environment
- 140 x 110 x 75.5 mm(H x D x W)
- IP20
- -40 to 68°C temp range (all conditions)
- Compact rugged metal construction

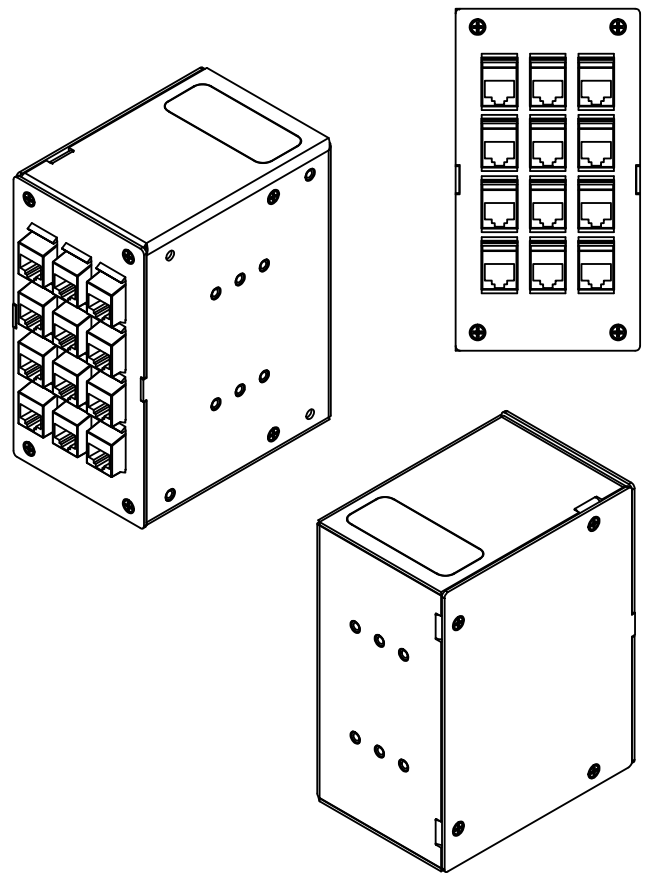

### PART CODE

#### **JCS-CT-CDM-UL-12-GY**

12PORT UNLOADED CAT COMPACT DINMOUNT

#### **JCS-CT-CDM-C6-12**

CAT6 UTP 12PORT DINMOUNT

#### **JCS-CT-CDM-C6AS-12**

CAT6A STP 12PORT DINMOUNT